




SPD-450 Padding Machine

Screening area	90 ft ² / 8.4 m ²
Operating weight	118,500 lbs / 53,864 kg
Engine type	Caterpillar C-13 ACERT
Horsepower	328 kW / 440 HP

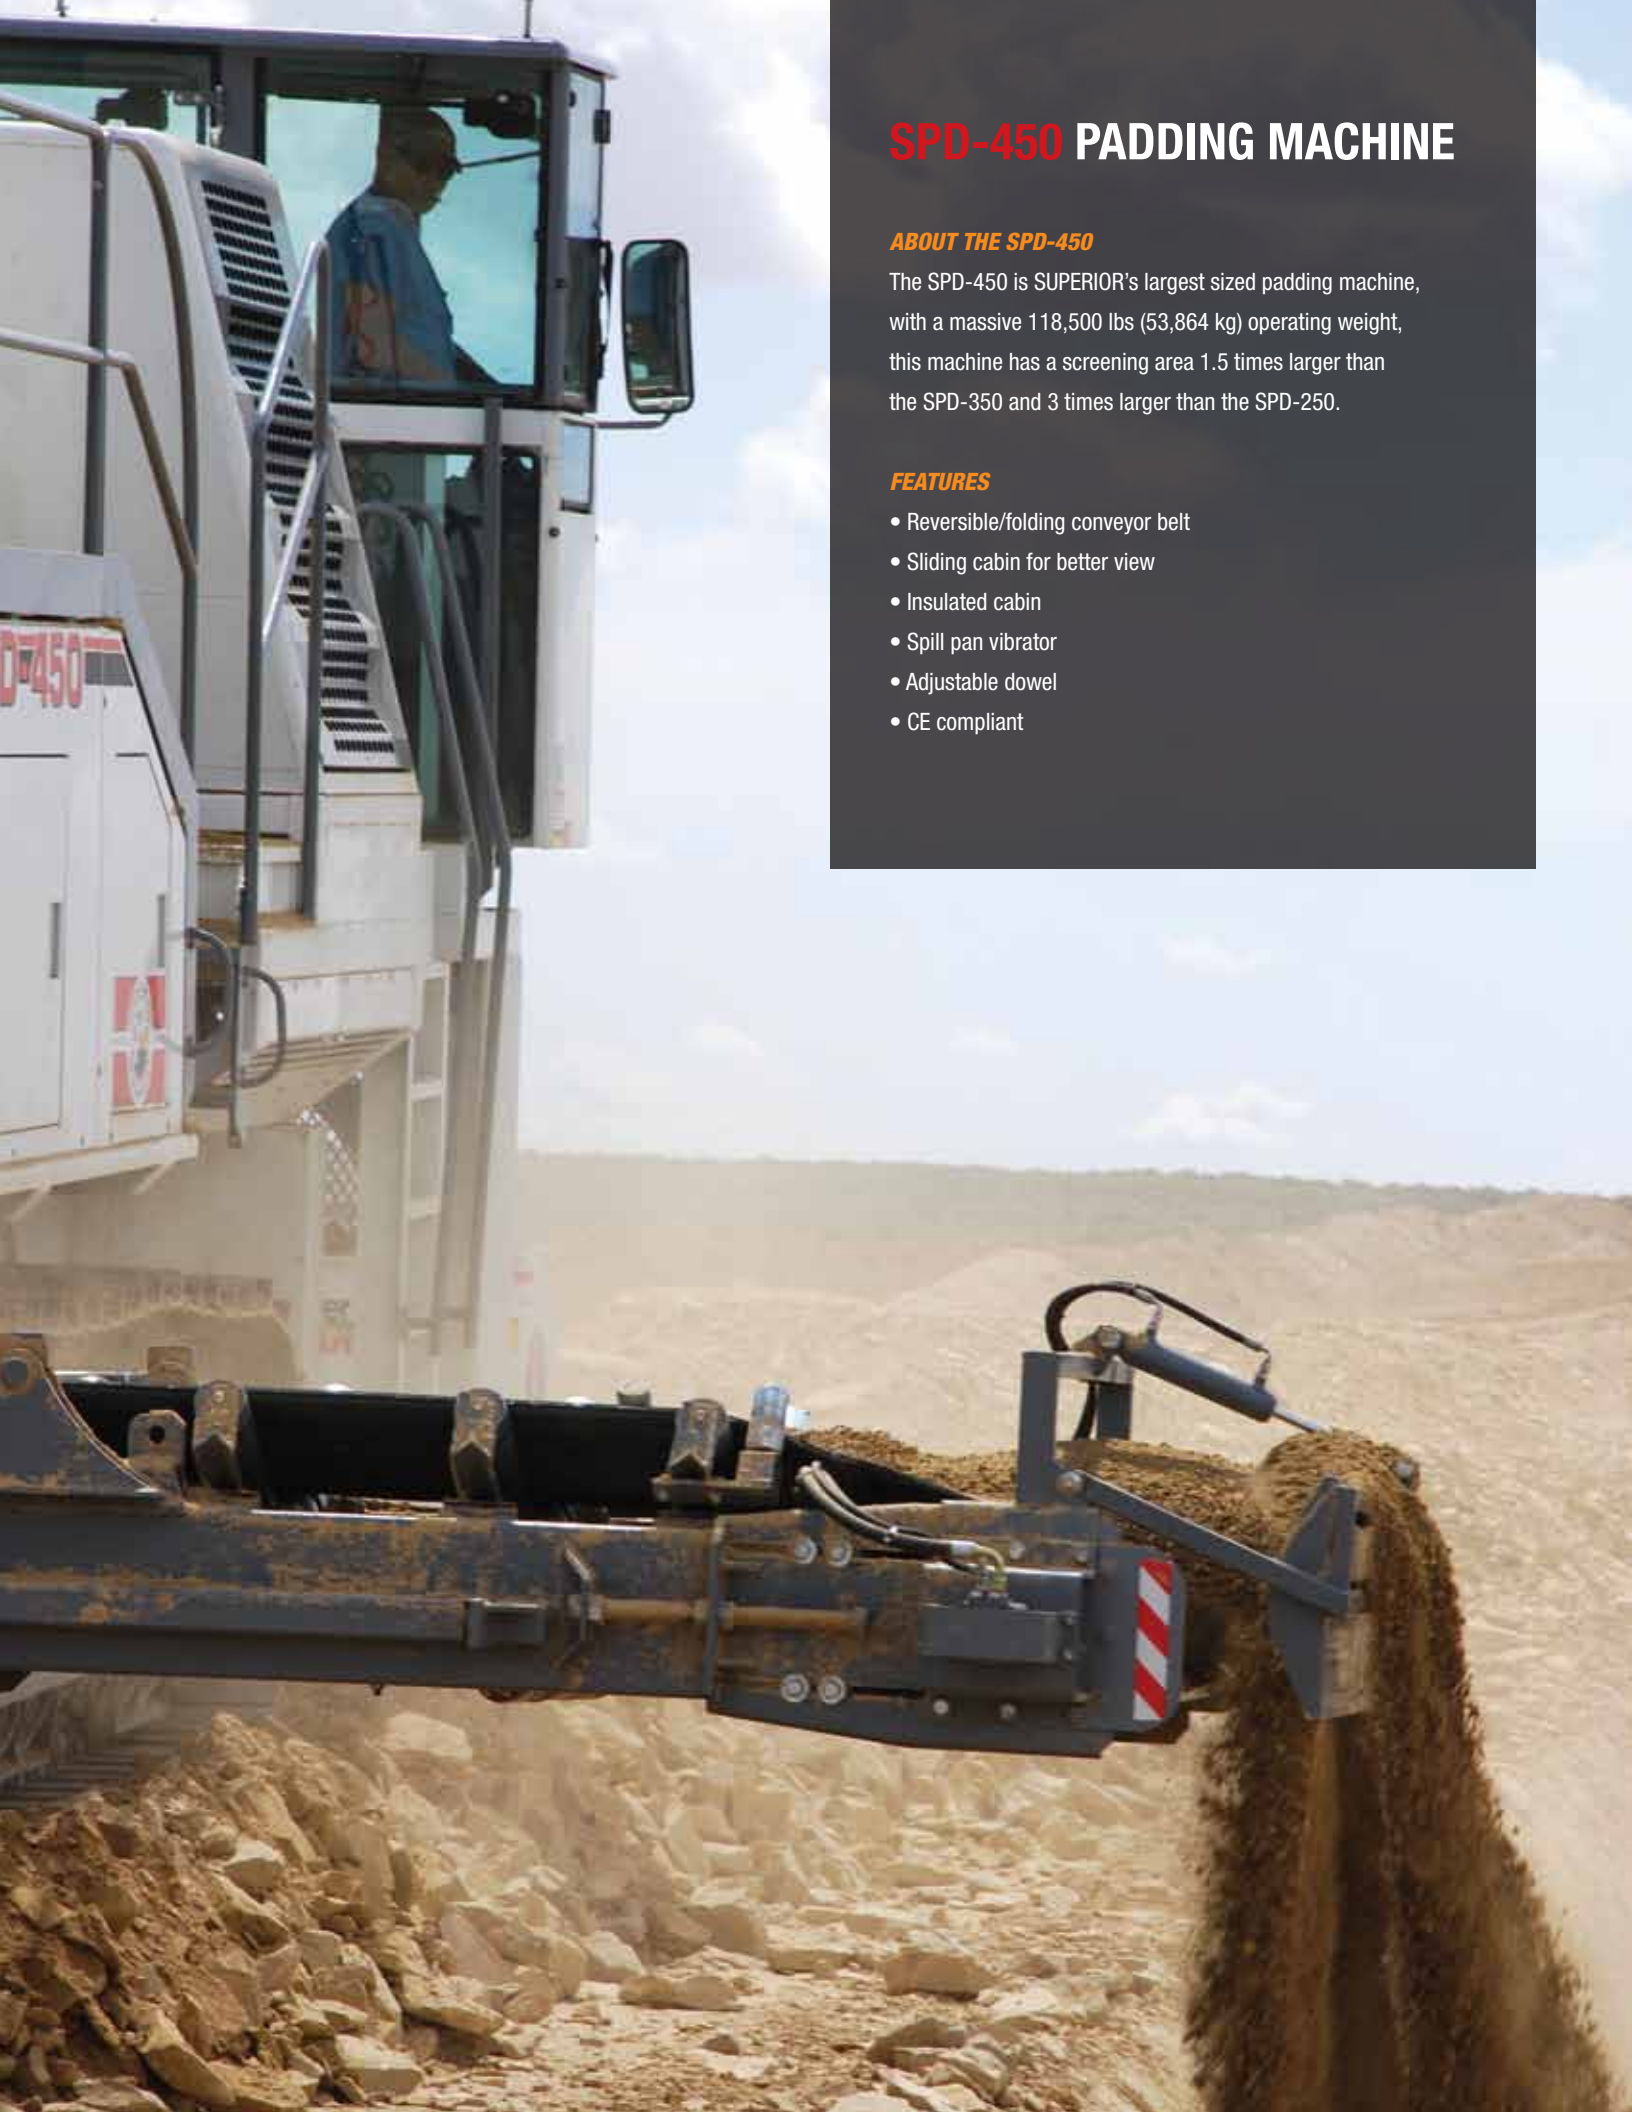

A large white SPD-450 padding machine is shown in operation on a construction site. The machine is processing a large pile of light-colored aggregate material, likely sand or gravel. A worker is visible inside the machine's cabin. The machine's conveyor belt system is actively moving the material. The background shows a clear sky and a distant horizon.

SPD-450 PADDING MACHINE

ABOUT THE SPD-450

The SPD-450 is SUPERIOR's largest sized padding machine, with a massive 118,500 lbs (53,864 kg) operating weight, this machine has a screening area 1.5 times larger than the SPD-350 and 3 times larger than the SPD-250.

FEATURES

- Reversible/folding conveyor belt
- Sliding cabin for better view
- Insulated cabin
- Spill pan vibrator
- Adjustable dowel
- CE compliant

GENERAL SPECIFICATIONS

ENGINE

Type	CATERPILLAR
Model	C-13 ACERT
Net flywheel power (DIN 6270)	440 HP - 328 kW
Governed speed	2,100 g/pm
Displacement	12.5 lt - 762.8 cu in

HYDRAULIC SYSTEM

Main pumps:	Bosch-Rexroth
	- 2 independent hydrostatic variable pumps travel
Maximum capacity	2x250 lt/min - 2x66 U.S. gal/min
Maximum operating pressure	420 bar - 6,090 p.s.i.
- 1 hydrostatic variable pump escalator	
Maximum capacity	240 lt/min - 63 U.S. gal/min
Maximum operating pressure	350 bar - 5,075 p.s.i.
- 1 hydrostatic variable pump load sensing service	
Maximum capacity	125 lt/min - 33 U.S. gal/min
Maximum operating pressure	250 bar - 3,625 p.s.i.

TRANSMISSION

Type	Hydrostatic
Motors	(HYDROMATIC) two motors with axial pistons disappearing into the track frames
Brakes	Integrated negative control
Final drives	Epicycloidal oil soaked
Maximum speed	
- 1 speed	2.5 km/h - 1.6 miles/hr
- 2 speed	4.8 km/h - 3 miles/hr

TRACK FRAME

Swinging track frame with sealed and lubricated chain	
Satl track chain pitch	215.9 mm - 8.5 in
Lower track rollers	10 per side
Upper track rollers	2 per side
Length of track on the ground	4,000 mm - 157 in
Standard shoes width	700 mm - 28 in
Gauge	3,050 mm - 120 in
Track shoes	49 per side
Lower track roller area	56,000 cm ²
Pressure on the ground	0,89 kg/cm ²

CONTROLS

Type	Pilot operated
Safety	Emergency shut-off

FLUID CAPACITIES

Fuel tank	720 liters - 190 U.S. gal
Hydraulic system circuit	800 liters - 212 U.S. gal

ESCALATOR

Type	Hydrostatic, operator controlled, variable speed
Vertical adjustment	Minus 13.5 inches to plus 5 ft
Chain Adjusters	Hydraulic
Reversible double chain escalator with steel shoes	
Shoes width	1,980 mm - 78 in
Shoes sprocket height	180 mm - 7 in

FRONT CRACKING WHEEL

Number of wheel	2
Transmission	Hydraulic
Hydraulic motor	1 orbital type
Lifter	1 hydraulic cylinder
Number of tools	6
Optional	Front roller ice crushing

SCREEN

Interchangeable screen mesh	1/2" to 4"
Width	2,400 mm - 94.5 in
Length	3,500 mm - 138 in
Area	90 sq ft - 8.4 m ²
Number of decks	1
Maximum capacity	209 m ³ /hr
Maximum feed size	570 mm - 22 in
Transmission	Hydrostatic
Hydraulic motor	1 gear type

CONVEYOR BELT

Bilateral hydraulic extension slide	
Type	Rubber
Width	1,000 mm - 39.4 in
Length	6,000 mm - 236 in
Variable speed	0 - 440 mt/min
Rotation capability	Reversible
Transmission	Hydraulic variable speed
Hydraulic motors	2 orbital type

ELECTRIC SYSTEM

Operating voltage	24 V
Maintenance free supplied batteries	2
Capacity (total)	160 Ah
Starter capacity	7.5 Kw
Alternator	60 A


PRODUCTION

Production rate will vary with certain conditions:	
Soil Condition, Pipe Size, Terrain, R.O.W.	
Indicative production, 24" pipe, normal soil	300 mt/h - 990 ft/hr

SPD-450 FEATURES




ADJUSTABLE CONVEYOR DOWEL
Controlled hydraulically to adjust angle and distance at which the material is placed back into the ditch.



REVERSIBLE CONVEYOR
Conveyor can be used on either side of machine. It also can be folded into 3 parts for easy shipping w/o disassembly.



SPILL PAN VIBRATOR
Prevents material from sticking to pan, especially when soil conditions are wet.



INSULATED ENGINE
Engine compartment reduces noise to comply with EU noise limit requirements.



ADJUSTABLE ENGINE
It can be adjusted to compensate for terrain gradients.



OSCILLATOR
hydraulically
different



CABIN GLASS PANELING
Open glass paneling throughout
cabin provides operator with 360°
unobstructed view.



OSCILLATING CABIN
Hydraulically slides out to either
side of the machine to facilitate
working on either side of the ditch.



INSULATED CABIN
Insulated cabin with heater and
A/C allows for total comfort, even
in the harshest environments.




CONTROL PANEL
Controls are duplicated on both
sides of the cabin for ease of op-
eration on either side of the ditch.



DIMENSIONS

Operating weight 119,050 lb / 54,000 kg (weight with optional ROPS: 123,393 lbs / 55,970 kg)

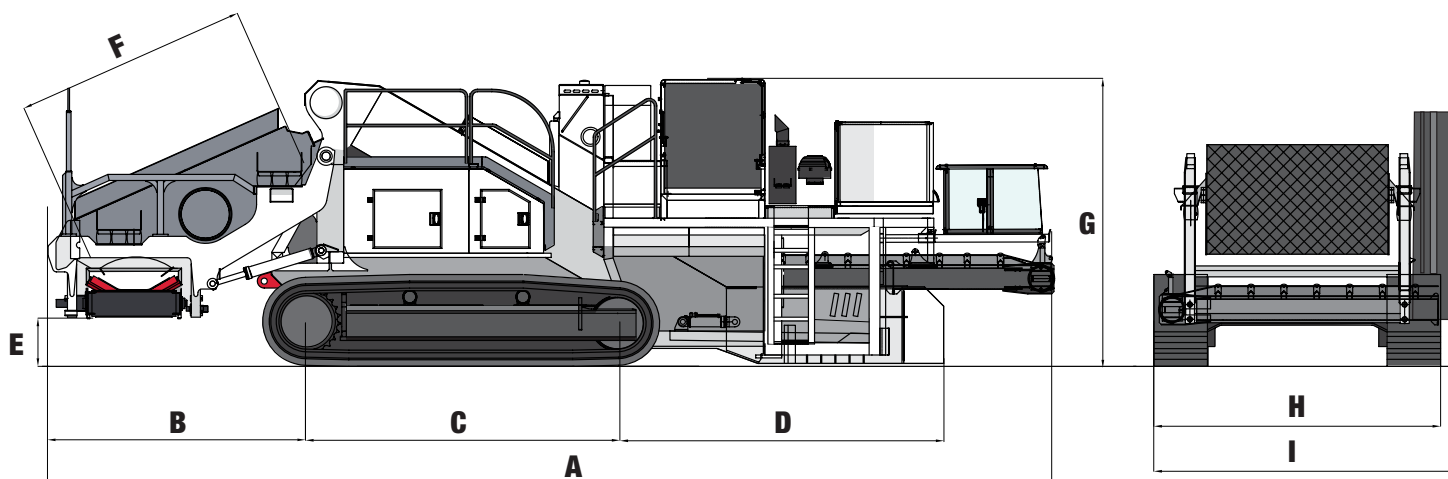

	Feet	Meters
A Overall length (with canopy disassembled for shipping)	43 ft	13.1 m
B Length of screen section	11.2 ft	3.4 m
C Length of tracks on ground	13.3 ft	4.07 m
D Length of front section	14 ft	4.27 m
E Ground clearance to conveyor	2 ft	62.5 cm
F Screen length	10.6 ft	3.24 m
G Height (with canopy, railings and muffler disassembled for shipping)	12.3 ft	3.75 m
H Tractor width	12.3 ft	3.75 m
I Overall width (with conveyor folded)	13.3 ft	4.07 m

Shipping disassembly

- Escalator railings are disassembled
- Muffler and air filter are disassembled and placed between engine and cab
- Conveyor belt long section is placed inside the front section
- Cabin is mounted on front supports

AVAILABLE MODELS



SBP-15
Screen volume: 1.15 m³ / 1.5 yd³



SBP-25
Screen volume: 1.9 m³ / 2.5 yd³



SPD-150
Screen Area: 2.3 m² / 25 ft²



SPD-160
Screen Area: 5.2 m² / 57 ft²



SPD-250
Screen Area: 2.78 m² / 30 ft²



SPD-350
Screen Area: 5.57 m² / 60 ft²



SPD-450
Screen Area: 8.4 m² / 90 ft²

CONTACT INFORMATION

Europe

Phone +49.0.231.963.3073

pipelinece@wwmach.com

Russia, China and the Middle East

Phone +39.349.198.1281 Italy

Phone +7.495.507.4827 Russia

fsupipeline@wwmach.com

India

Phone +91.11.414.59230

pipelineind@wwmach.com

Africa

Intl. Toll Free 800.9675.3948

pipeline@wwmach.com

North America

Phone +1.281.457.4400

pipelinena@wwmach.com

Latin America

Phone +52.81.8.394.0160

pipelinesa@wwmach.com

Brazil

Phone 800.9675.3948

pipelinebr@wwmach.com

Australia

Phone +61.0.400.144.432

pipelinece@wwmach.com



16031 East Freeway

Houston, TX 77530

Phone 281.457.4400 Fax 281.452.5455

U.S. Toll Free 800.383.2666 Intl. Toll Free 800.9675.3948

pipeline@wwmach.com

www.worldwidemachinery.com